

LANDSCAPE AND GARDEN LIGHTING

A modern, dark green, circular landscape light fixture with a silver ring, standing in a garden with lush green foliage. The fixture has a dark green top and a silver ring around its base. It is surrounded by various green plants, including some with variegated leaves. The background is a soft-focus garden scene.

OUTDOOR LIGHTING

IT - Platek è un'azienda internazionale proiettata all'innovazione nel settore dell'illuminazione architettuale e decorativa per esterni. La gamma di prodotti comprende sistemi integrati di illuminazione architettuale, composti da incassi a pavimento, applique, sospensioni, proiettori e paletti, tutti con gruppi ottici con tecnologia LED progettati internamente e realizzati in esclusiva per Platek. Il grande know-how del gruppo Donati, del quale Platek fa parte, nella fusione dei metalli e delle leghe di alluminio ha permesso all'azienda di progettare e realizzare corpi illuminanti sempre più compatti e performanti, sia sotto il profilo della potenza luminosa che dell'efficienza energetica. Platek indaga il rapporto tra l'uomo e l'ambiente per migliorare la qualità della vita attraverso l'illuminazione efficiente e sostenibile, portando la giusta quantità di luce dove serve per esplorare nuovi modi di vivere gli spazi residenziali, per valorizzare le architetture, il patrimonio storico e per creare paesaggi luminosi nelle aree verdi.

EN - Platek is an international company projected to innovate in the field of architectural and decorative outdoor lighting. The range of products includes integrated architectural lighting systems consisting of floor recessed concealed lighting, appliques, suspensions, projectors and posts. All these products have an optical systems with LED technology, managed internally by the company. The excellent know how of the Donati Group - to which Platek belongs - in metal casting allowed the company to design and realize increasingly compact and high-performance lighting fixtures, both in terms of luminous power and energy efficiency. Platek investigates the relationship between man and the environment to improve quality of life through efficient and sustainable lighting, bringing the right quantity of light where needed in order to explore new ways of reviving residential spaces, to enhance the architecture, the historical and the cultural heritage of the area, and to create luminous landscapes in green areas.



GREEN FOREST

IT - Platek celebra la nuova nuance Green Forest delle collezioni Chiodo, Chiodino, Frog e Nano ispirata dalla natura per i Design Lovers. Green Forest inaugura un percorso fatto di sofisticate finiture e inusuali scelte cromatiche per alcune delle icone più note del catalogo Platek. Vivere all'aperto è connettersi con la natura ed il paesaggio e il nuovo colore si integra perfettamente nello spazio esterno. Uno spazio da decorare e illuminare, con prodotti di design e suggestioni di colore che trasformano l'esperienza dell'outdoor living.

EN - Platek celebrates the new Green Forest nuance for Chiodo, Chiodino, Frog, and Nano collections: a color inspired by nature and dedicated to design lovers. Green Forest starts a new path made of fine finishes and surprising chromatic choices for some of Platek's most famous icons. Living outside means to connect with nature and landscapes, and the new color perfectly fits the outdoor environment. A space to decorate and illuminate, with design products and evocative colors evolving the experience of the outdoor living.



ROSE BALLERINA

IT - Delicato e audace. Non convenzionale e versatile. Rose Ballerina è il colore moderno per eccellenza che dona a prodotti e progetti un tocco di unicità e freschezza. È l'ultima affermazione di Platek: una tonalità che viaggia per le strade dello stile e porta la dolce carezza della natura. La natura è la più potente fonte di ispirazione e bellezza. Lo stile è il modo più libero per esprimere identità e raccontare storie personali. Rose Ballerina traduce in un colore l'intersezione di questi mondi: due mondi diventano una sfumatura. Trovare l'essenza della moda della natura significa dare vita a una tendenza senza tempo, qualcosa che manterrà il suo fascino per sempre.

EN - Delicate and bold. Unconventional and versatile. Rose Ballerina is the quintessential modern color that gives products and projects a touch of freshness and originality. It is Platek's ultimate statement: a shade that walks the streets of style and brings the gentle caress of nature. Platek decided to dress in Rose Ballerina a selection of products whose design and attitude encapsulate this bond between nature and style, with minimal shapes and pure geometries echoing the urban architectural language.

design by
Danesi & Buzzoni



ETEREA medium applique



ETEREA large battery



ETEREA large

outdoor table lamp



ETEREA 2.0
large

IP65
IK 08

215 x 215 x h. 455 mm
5 m cable length



WHITE LED
3000K CRI>80
220-240V 50/60Hz ⚡

→ h. 455 mm



94 14 819



17,5W | 735 lm (*)
114° diffuse beam
400 cd/klm


battery lamp



ETEREA 2.0
medium
battery

IP65
IK 07

150 x 150 x h. 300 mm
USB 1 m cable included
battery autonomy: 6 hours



WHITE LED
3000K CRI>90
battery 🔋

→ h. 300 mm



94 14 219



2,8W | 275 lm (*)
100° diffuse beam
443 cd/klm

(*) Real Data


applique



ETEREA 2.0
medium
applique

IP65
IK 08

150 x 150 x h. 300 mm
IP68 connector included



COB LED
3000K CRI>80
220-240V 50/60Hz ⚡

→ h. 300 mm



94 14 419



9,6W | 385 lm (*)
114° diffuse beam
400 cd/klm

(*) Real Data

design by
Marco Acerbis



MESH battery outdoor table lamp



MESH applique



MESH bollard



MESH battery outdoor table lamp

outdoor table lamp




MESH
outdoor battery
table lamp

IP65
IK 07

battery autonomy: 6 hours

ø 200 x h. 420 mm



WHITE LED

3000K CRI>90
battery



32 55 116



4,5W | 115 lm (*)
87° diffuse beam

bollard



MESH
bollard

IP65
IK 07

ø 200 x h. 800 mm
ø 200 x h. 1200 mm

IP68 connector included



WHITE LED

3000K CRI>90
220-240V 50/60Hz



32 40 216 - h. 800
32 40 316 - h. 1200



12W | 295 lm (*)
87° diffuse beam
545 cd/klm

(*) Real Data

applique



MESH
applique

IP65
IK 06

ø 200 x h. 190 mm

IP68 connector included



WHITE LED

3000K CRI>90
220-240V 50/60Hz



32 10 116



12W | 310 lm (*)
87° diffuse beam
537 cd/klm

ceiling mounted



MESH
ceiling mounted

IP65
IK 07

ø 200 x h. 480 mm
ø 200 x h. 880 mm

IP68 connector included



WHITE LED

3000K CRI>90
220-240V 50/60Hz



32 70 116 - h. 480
32 70 216 - h. 880



12W | 310 lm (*)
87° diffuse beam
537 cd/klm

(*) Real Data



MESH XL ceiling mounted



MESH XL floor



MESH XL floor

floor




MESH XL
floor

IP65
IK 07

ø 500 x h. 1900 mm

3 m cable length
(C/W IP44 SCHUKO plug)



WHITE LED

3000K CRI>90
220-240V 50/60Hz ⊕
TRIAC dimmable



32 50 816



27W | 1520 lm (*)
82° diffuse beam
560 cd/klm

ceiling mounted




MESH XL
ceiling mounted

IP65
IK 07

ø 500 x h. 635 mm

IP68 connector included



WHITE LED

3000K CRI>90
220-240V 50/60Hz ⊕
TRIAC dimmable



32 70 616



27W | 1620 lm (*)
82° diffuse beam
560 cd/klm

(*) Real Data

FLAMINGO

PLATEK - OUTDOOR LIGHTING

design by
Sara Moroni


PLATEK - LANDSCAPE AND GARDEN LIGHTING



FLAMINGO bollard



FLAMINGO floor

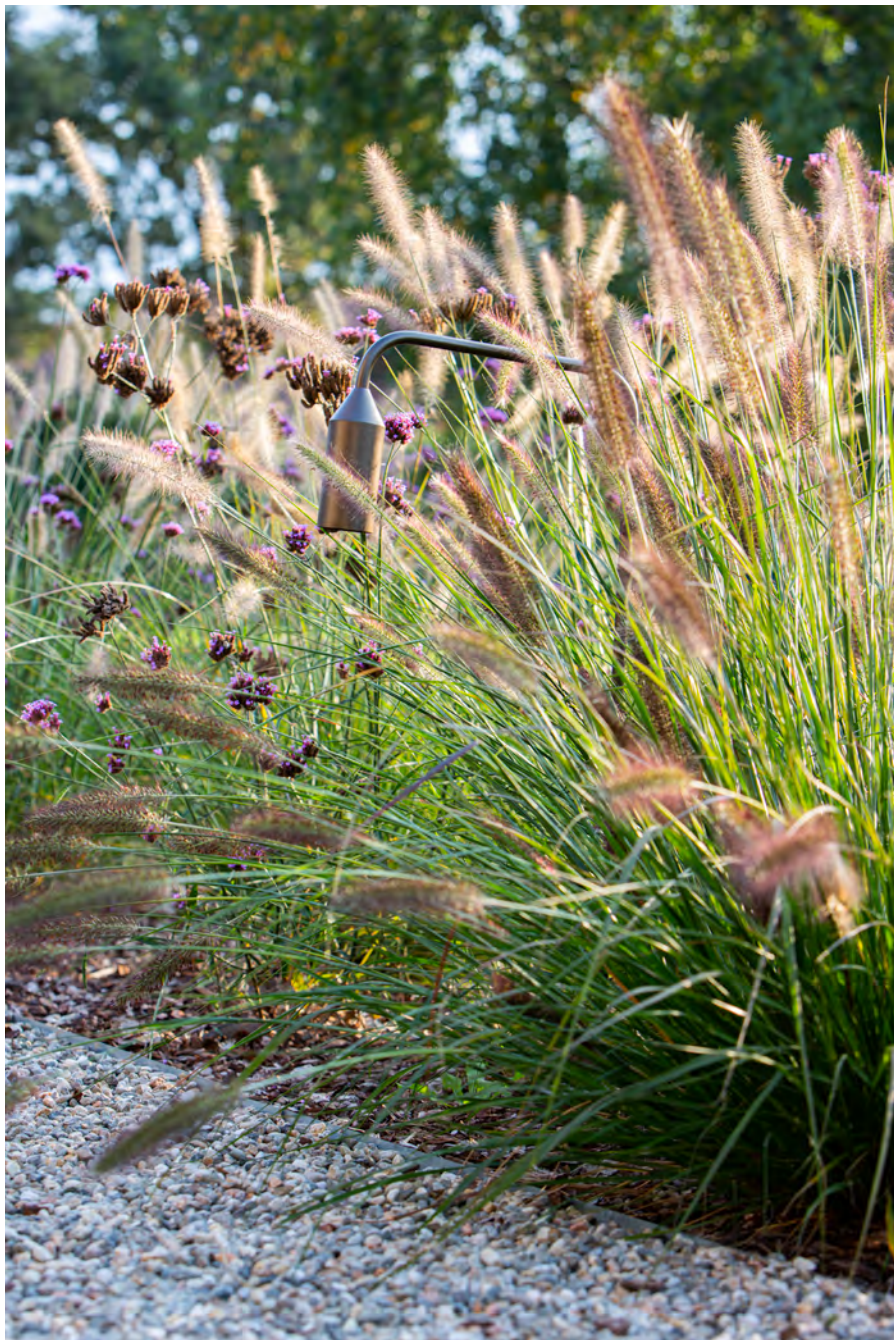

FLAMINGO bollard



FLAMINGO floor



FLAMINGO bollard

ceiling mounted



FLAMINGO
ceiling mounted

IP65
IK 06

h. 170 mm
h. 800 mm



COB WHITE LED

3000K CRI>80
220-240V 50/60Hz ⊕

TRIAC dimmable

→ h. 170 mm



30 70 116



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm

→ h. 800 mm



30 70 216



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm



applique



FLAMINGO
applique

IP65
IK 06

370 mm
1400 x h. 850 mm
1400 x h. 2200 mm



COB WHITE LED

3000K CRI>80
220-240V 50/60Hz ⊕

TRIAC dimmable



30 10 116



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm



30 10 216



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm



30 10 316



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm

(*) Real Data



FLAMINGO bollard

floor




FLAMINGO
floor

IP65
IK 06

h. 1500 mm
h. 1900 mm

5 m cable length
Prise SCHUKO IP44 incluse



COB WHITE LED

3000K CRI>80
220-240V 50/60Hz ⚡

TRIAC dimmable

→ h. 1500 mm



30 50 216



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm

→ h. 1900 mm



30 50 316



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm

bollard




FLAMINGO
bollard

IP65
IK 06

h. 800 mm
h. 1500 mm
h. 1900 mm

IP68 connector included



COB WHITE LED

3000K CRI>80
220-240V 50/60Hz ⚡

TRIAC dimmable

→ h. 800 mm



30 40 116



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm

→ h. 1500 mm



30 40 216



7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm

→ h. 1900 mm



30 40 316




7,5W | 385 lm (*)
75° diffuse beam
680 cd/klm

(*) Real Data

design by
Danesi & Buzzoni



CHIODINO spike

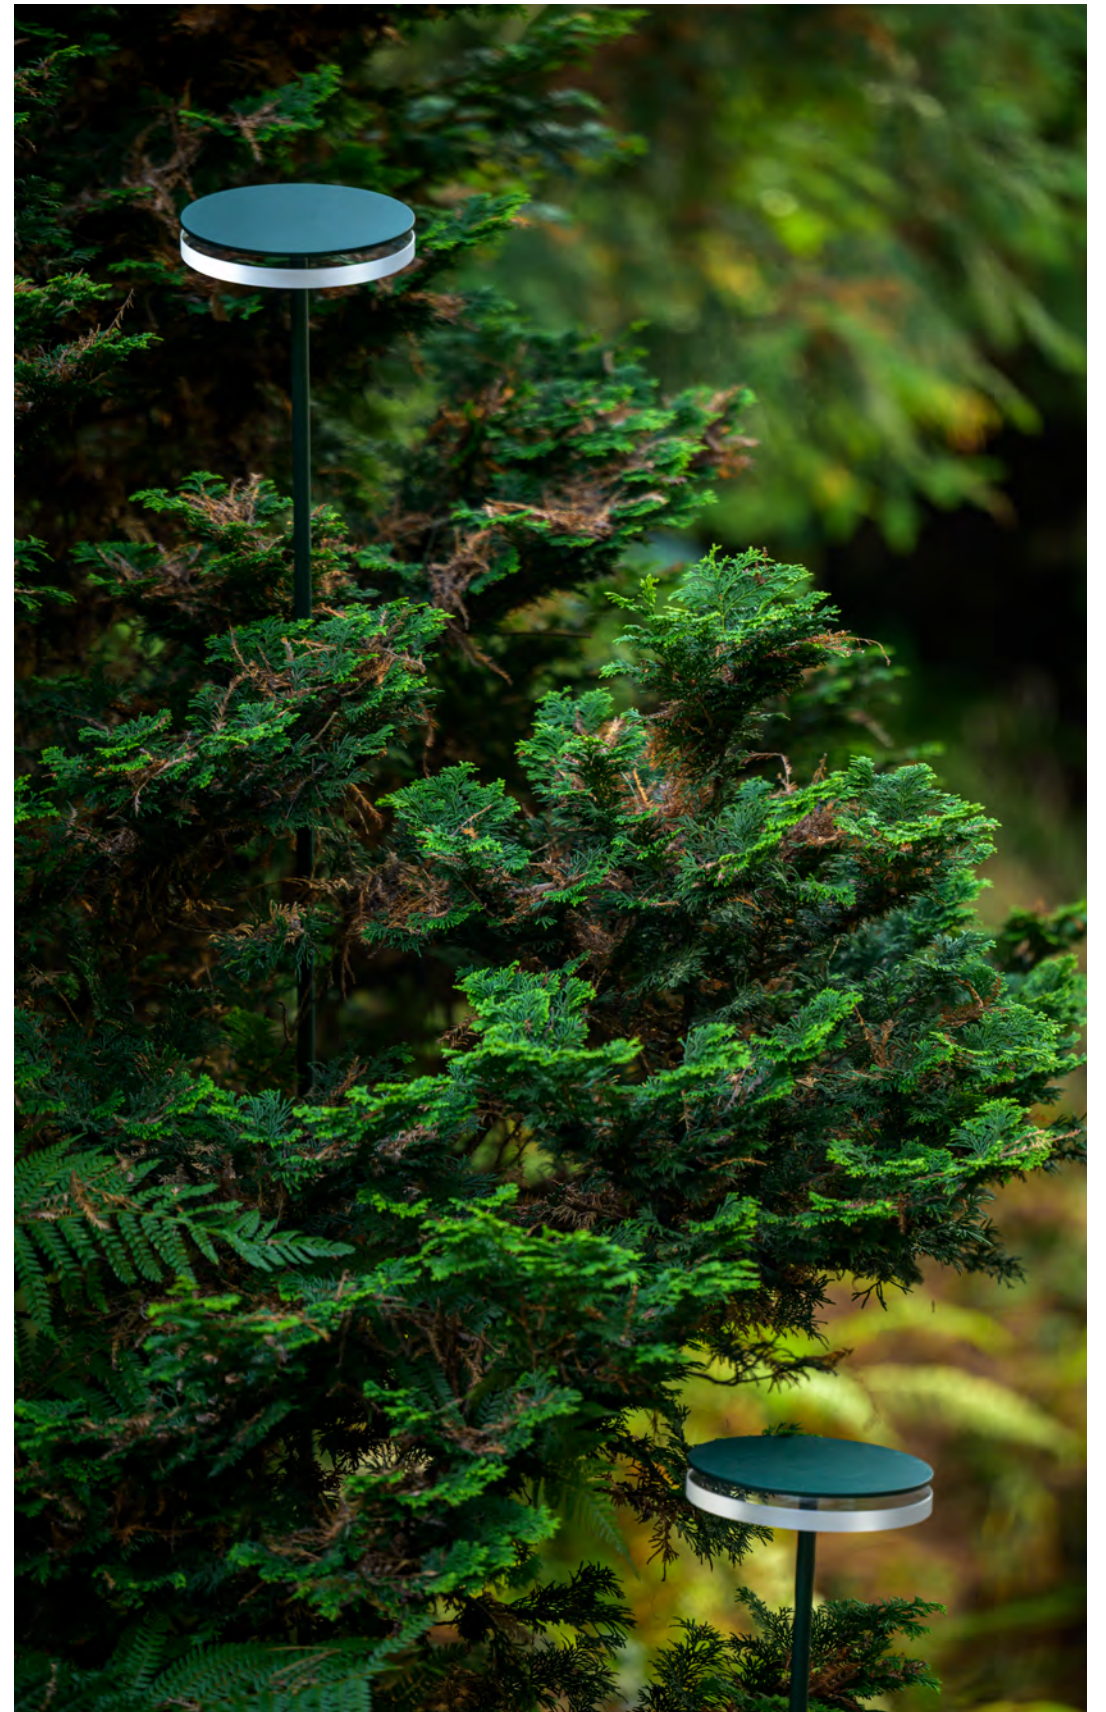

CHIODINO spike



CHIODINO spike

spike / bollard




CHIODINO
spike / bollard

IP65
IK 05

ø 110 × h. 500 mm
ø 110 × h. 1000 mm
ø 110 × h. 1600 mm

h. 500 mm: 4,5 m cable length
h. 1000 mm: 4 m cable length
h. 1600 mm: 3,4 m cable length



WHITE LED

3000K CRI>90
24V DC -

→ h. 500 mm



94 40 114 (bollard)
94 02 114 (spike)



6W | 430 lm (*)
93° diffuse beam
495 cd/klm

→ h. 1000 mm



94 40 214 (bollard)
94 02 214 (spike)



6W | 430 lm (*)
93° diffuse beam
495 cd/klm

→ h. 1600 mm



94 40 314 (bollard)
94 02 314 (spike)



6W | 430 lm (*)
93° diffuse beam
495 cd/klm

(*) Real Data

design by
Danesi & Buzzoni



CHIODO spike



CHIODO spike



CHIODO spike

spike / bollard




CHIODO
spike / bollard

IP65
IK 07

ø 180 × h. 605 mm
ø 180 × h. 1105 mm
ø 180 × h. 1705 mm

h. 600 mm: 4,4 m cable length
h. 1100 mm: 3,9 m cable length
h. 1700 mm: 3,3 m cable length



WHITE LED

3000K CRI>80
220-240V 50/60Hz ⊕

→ h. 600 mm



94 40 116 (bollard)
94 02 116 (spike)



12W | 595 lm (*)
93° diffuse beam
400 cd/klm

→ h. 1100 mm



94 40 216 (bollard)
94 02 216 (spike)



12W | 595 lm (*)
93° diffuse beam
400 cd/klm

→ h. 1700 mm



94 02 316 (bollard)
94 02 316 (spike)



12W | 595 lm (*)
93° diffuse beam
400 cd/klm

(*) Real Data



design by
Maurizio Quargnale



ESAGONO



ESAGONO spike



ESAGONO spike

mobile product




ESAGONO
mobile product

IP65
IK 05

600 mm
1200 mm

5 m cable length



WHITE LED

3000K CRI>80
220-240V 0/50/60Hz ⊕

→ 600 mm



84 86 614



11W | 375 lm (*)
sandblasted
71° - 508 cd/klm

→ 1200 mm



84 86 616



22W | 750 lm (*)
sandblasted
71° - 508 cd/klm

(*) Real Data

design by
Sara Moroni





FROG floodlight



FROG bollard



FROG spike


FROG



FROG

IP66
IK 08

3 m cable length



COB WHITE LED

3000K CRI>80
220-240V 50/60Hz ⊕

TRIAC dimmable



88 00 011



9,6W | 655 lm (*)
26°
3090 cd/klm



88 00 013



9,6W | 595 lm (*)
45°
1220 cd/klm



88 00 018



9,6W | 570 lm (*)
102°
400 cd/klm

(*) Real Data

NANO NANO XL NANO XXL floodlight






NANO XL floodlight



NANO XL floodlight

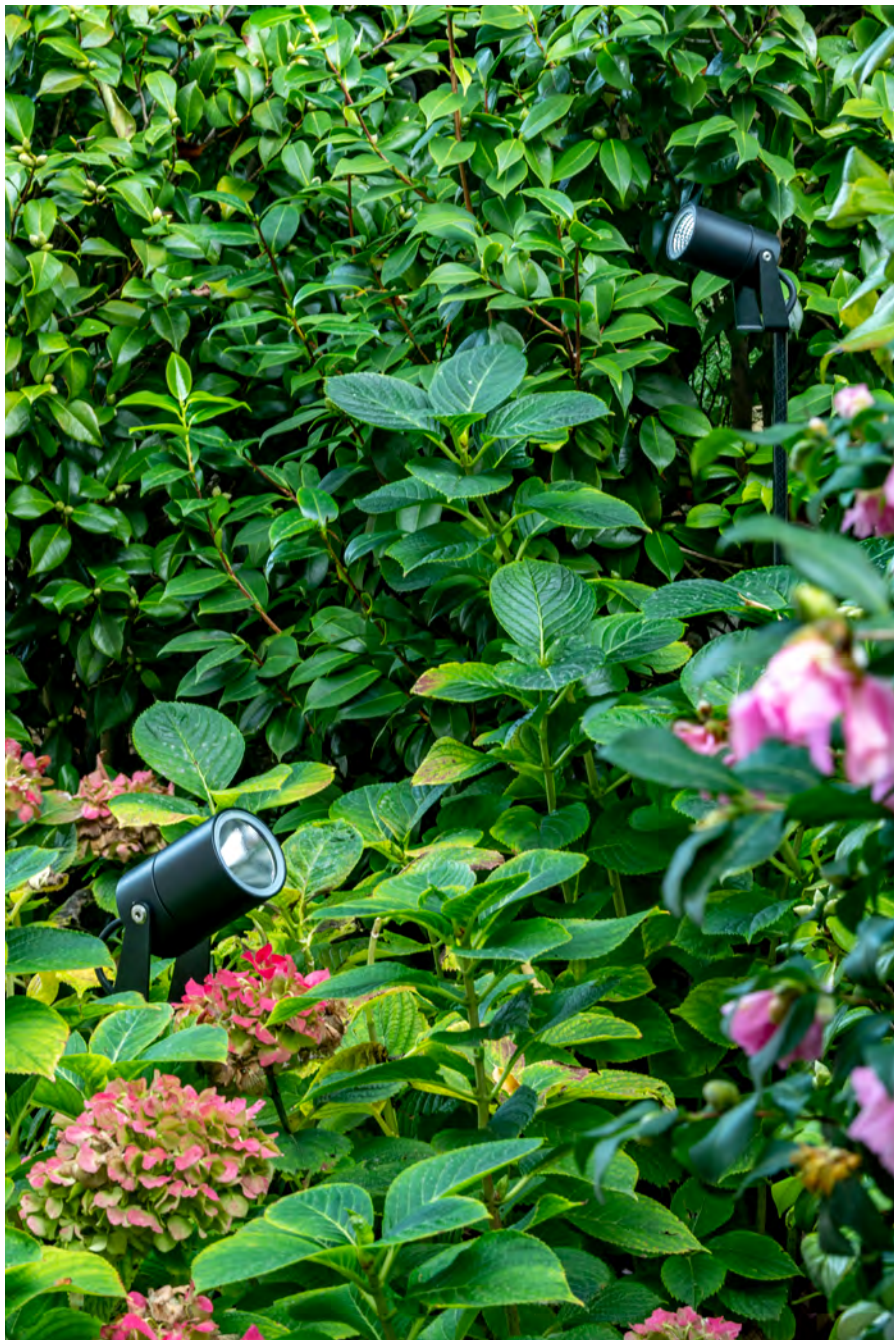

NANO floodlight



NANO XL floodlight



NANO XL floodlight



NANO XL floodlight

Aluminium floodlight




NANO
NANO XL
NANO XXL
floodlight

IP66
IK 08

ø 35 x h. 63 mm
ø 50 x h. 90 mm
ø 80 x h. 143 mm

5 m cable length



NANO floodlight

WHITE LED

3000K CRI>80
24V DC ⚡
power supply to be ordered
separately



94 05 011



94 05 013



2,7W | 175 lm (*)
14°
12720 cd/klm



2,7W | 160 lm (*)
21°
5600 cd/klm



94 05 018



94 05 017



2,7W | 150 lm (*)
33°
2580 cd/klm



2,7W | 160 lm (*)
45° x 13°
4530 cd/klm

NANO XL floodlight

COB WHITE LED

3000K CRI>80
220-240V 50/60Hz ⚡
dimmable TRIAC



94 05 111



94 05 118



7,5W | 300 lm (*)
20°
12720 cd/klm



7,5W | 310 lm (*)
30°
2580 cd/klm

NANO XXL floodlight

COB WHITE LED

3000K CRI>80
220-240V 50/60Hz ⚡
dimmable TRIAC



94 05 213



94 05 218



16W | 970 lm (*)
32°
5600 cd/klm



16W | 1000 lm (*)
50°
2580 cd/klm

(*) Real Data



NANO floodlight

FULL INOX floodlight



NANO
FULL INOX

IP68 full dry
IK 08

ø 35 x h. 63 mm

0,5 m cable length



NANO FULL INOX floodlight

WHITE LED

3000K CRI>80
@700mA
power supply to be ordered
separately



84 32 011



2W | 175 lm (*)
14°
12720 cd/klm



84 32 013



2W | 160 lm (*)
21°
5600 cd/klm



84 32 018



2W | 150 lm (*)
33°
2580 cd/klm



84 32 017




2W | 160 lm (*)
45° x 13°
4530 cd/klm

design by
Danesi & Buzzoni






PASSO corten steel

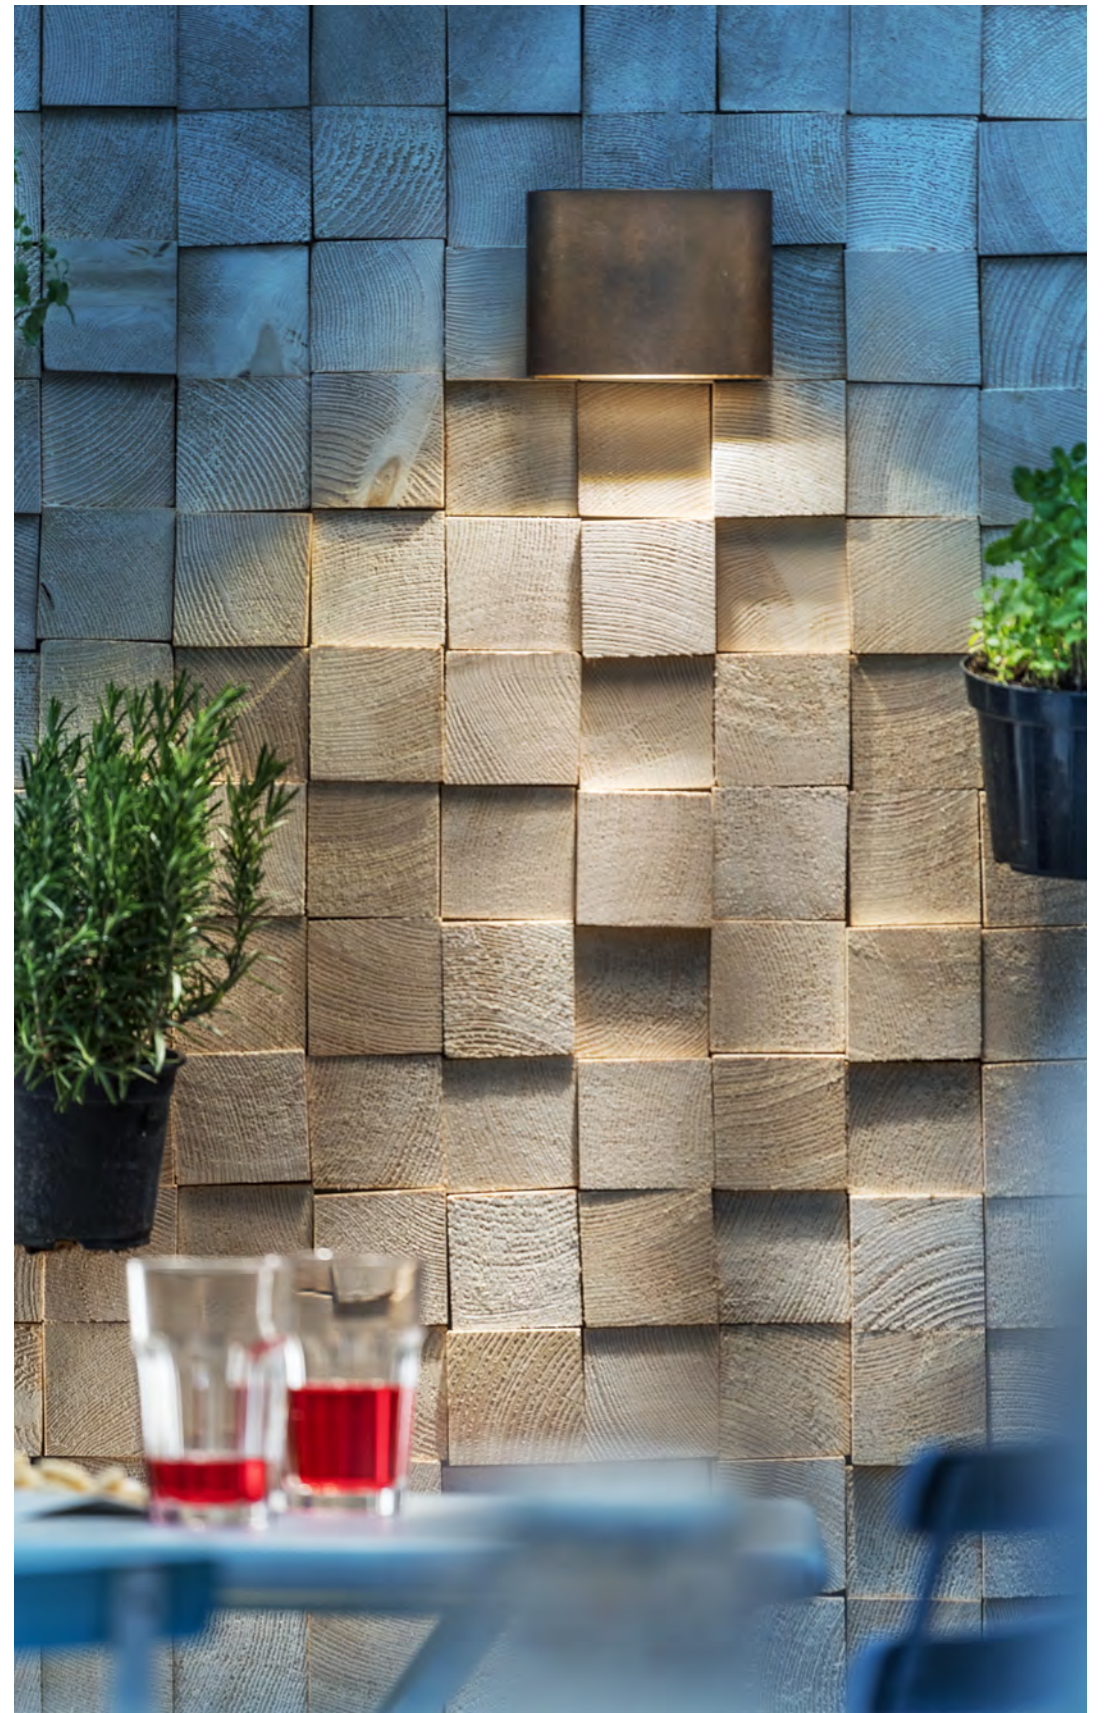

PASSO corten steel

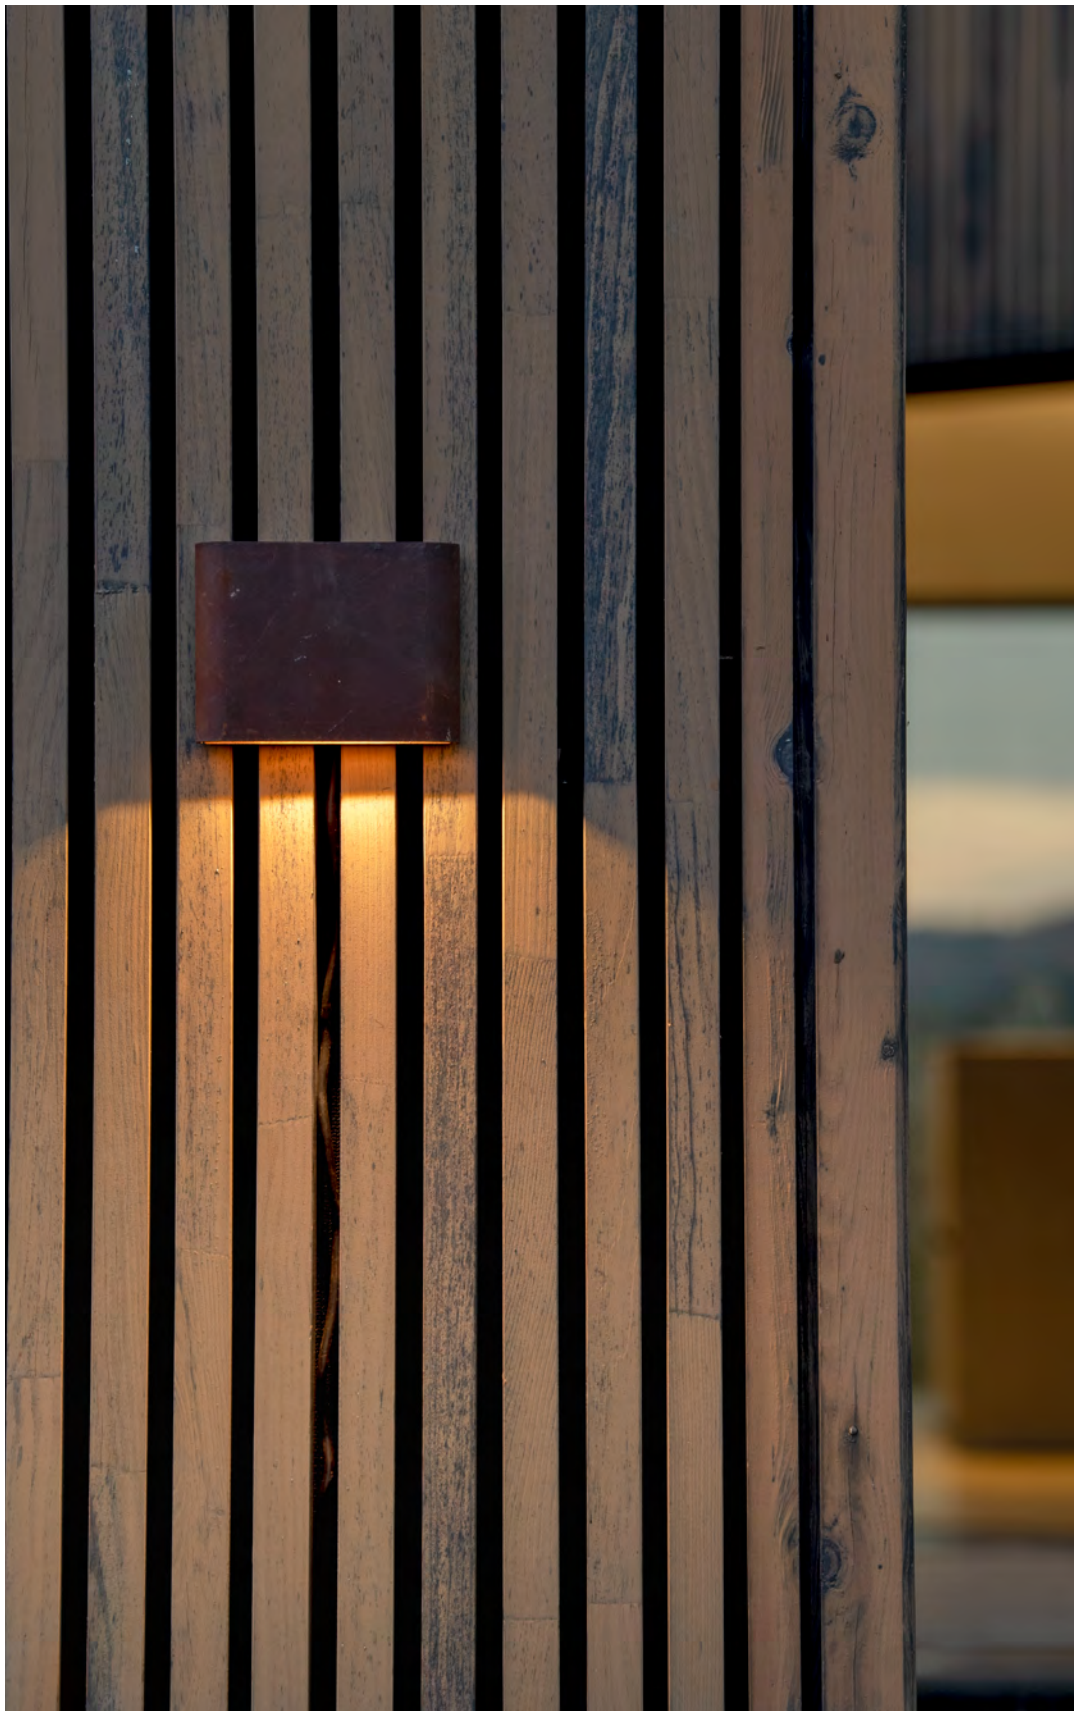

PASSO corten steel



PASSO AISI 316L stainless steel inox



PASSO AISI 316L stainless steel inox

grazing lighting / applique



PASSO

IP65
IK 06

110 x 145 mm

AISI 316L stainless steel inox
corten steel

3 m cable length



WHITE LED

3000K CRI>80
24V DC - 



94 04 411
stainless steel inox



7,5W | 90 lm (*)
1 opening
diffuse beam
1390 cd/klm



94 04 811
corten steel



7,5W | 90 lm (*)
1 opening
diffuse beam
1390 cd/klm

(*) Real Data

Platek Srl
Registered Office: Via Paderno, 19
Head Office: Via Marrocco, 4
25050—Rodengo Saiano (BS), Italy
P.Iva 03320290178
C.F. 03007130176

T +39 030 68 18 201
F +39 030 68 16 567
info@platek.eu
www.platek.eu

Art Direction
Gusto IDS
Platek

Graphic design
Gusto IDS
Platek

Photo
Ottavio Tomasini
Germano Borrelli
Edoardo Delille

© Platek 2022

FOLLOW US

youtube.com/platek
pinterest.it/platek
linkedin.it/platek
instagram.com/platek
facebook.com/platek

Platek ON LINE

bimobject.com/platek
archiproducts.com/platek
architonic.com/platek
archilovers.com/platek

Platek for planet



Information

The data in this document are valid on the print date.
Any updates are available on our website www.platek.eu

FOLLOW US



